


RETROFIT INSTALLATION

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

- Make sure the power is turned off in which you are installing the products.
- Choose CCT & lumens that you want by dip switch. (Fig 1)
- If existing lamp and trim are present, remove from ceiling or move it out of the way as it will not be needed during installation. Measure the ceiling opening to make sure the edge of the luminaire will cover the entire hole and still sit firmly in the ceiling before proceeding. (Fig 2)
- Attach the carabiner safety clip to the existing fixture housing. (Fig 3)
- Insert lamp conduit into the 1-box and wire to power source (black to hot, white to neutral, violet to 0-10 V dimming positive, pink to 0-10 V dimming negative) (Fig. 4). Reattach 1-box cover when done.
- Squeeze the two housing clips so they are in an upright position and insert lamp into housing. (Fig 5)
- Once lamp is inside the housing, release the housing clips and continue pushing lamp into housing until securely fixed and flush with ceiling. (Fig 6)
- Restore power at the source and the installation is complete.

WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

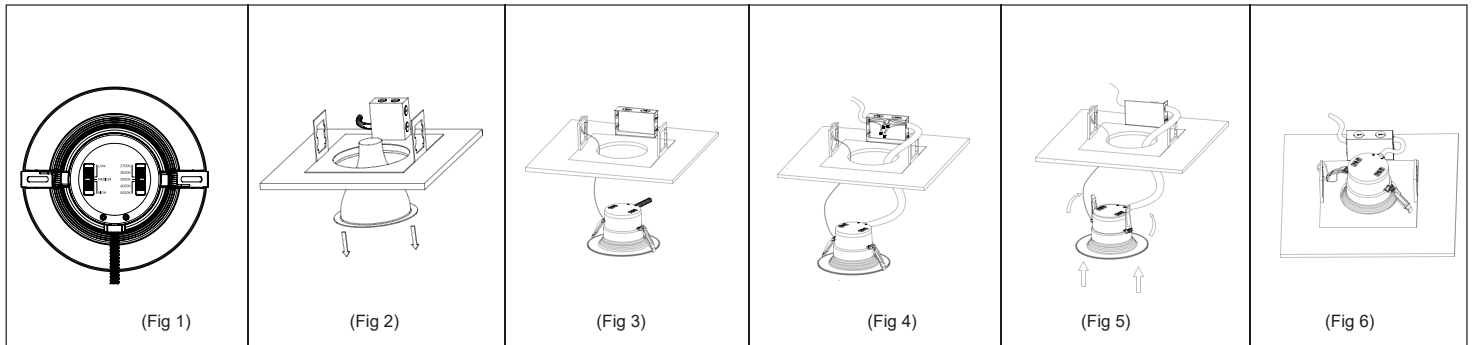

NEW CONSTRUCTION INSTALLATION

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

- Make sure the power is turned off in which you are installing the products.
- Choose CCT & lumens that you want by dip switch. (Fig 1)
- Attach the carabiner safety clip to the existing fixture housing. (Fig 7)
- Insert lamp conduit into the 1-box and wire to power source (black to hot, white to neutral, violet to 0-10 V dimming positive, pink to 0-10 V dimming negative) (Fig. 8). Reattach 1-box cover when done.
- Squeeze the two housing clips so they are in an upright position and insert lamp into opening. (Fig 9)
- Once lamp is inside the opening, release the housing clips and continue pushing lamp into opening until securely fixed and flush with ceiling. (Fig 10)
- Restore power at the source and the installation is complete.

WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.

