

WARNINGS & SAFETY INFORMATION:

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.

To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For The installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING: RISK OF FIRE OR ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.


CAUTION: RISK OF INJURY

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Suitable for Dry or Damp locations.

 **WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.**



INCLUDED MATERIALS

- A : Surface Mounting**
- B : Chain Suspended Mounting**
- C : End Cap**

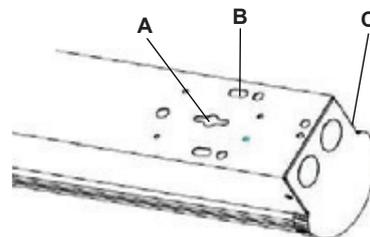

SURFACE MOUNTING:


1. Move the lens to the left or right and remove the lens after there are gaps between the lens and the end cap of the fixture.
2. Remove the screws that hold the LED module plate using a screwdriver.
3. Use tapping screws to fix fixture to the ceiling or plane where it needs to be installed.
4. After fixing the fixture, restore the LED module board and lens according to the assembly method before disassembly.

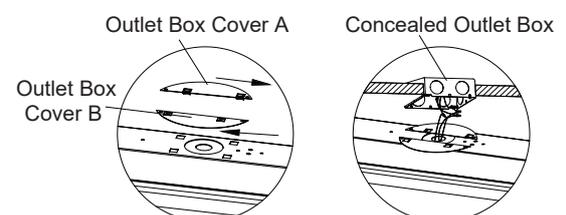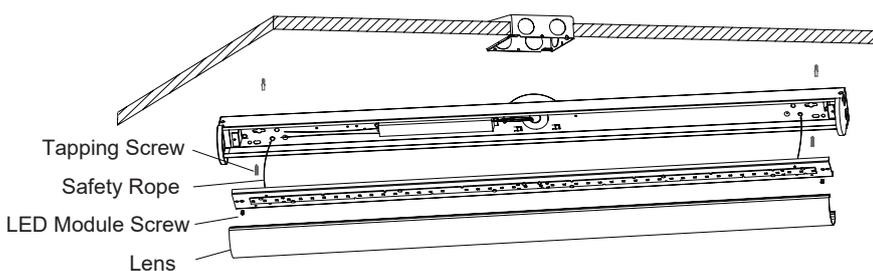

SIMPLEX LINEAR LOW BAY

CHAIN MOUNTING WITH V-HOOK

1. Determine position and adjust the length of metal chain to required length and affix to luminaire.
2. Attach the matching metal V-Hooks into the designated hook mounting hole of the product so that the V-Hook and metal chain are firmly connected.
3. The fixture power line is protected by metal hose. The power line should be connected correctly according to the fixture power line installation diagram. The length of the metal hose should be adjusted according to the actual installation height.

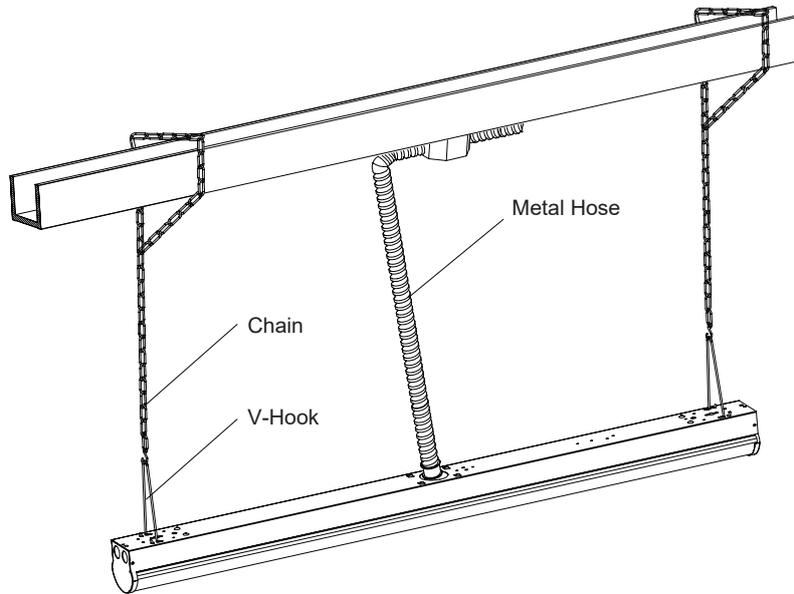

LENS INSPECTION: After installation check to make sure the lens is completely secure inside the lamp body and the end cap. Gently pull down on the lens to ensure it does not shift.

GENERAL WIRING DIAGRAM

