



Bruno Yard Light

FEATURES

- Exceptional light output with even and wide distribution.
- Quick and easy installation.
- Rugged construction with sealed die-cast profile makes it ideal for outdoor applications.
- Comes with a Polycarbonate optical lens and twist lock photo cell.
- Suitable for operation in low working temperature.
- Can be mounted directly or with mounting arm.

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	125 lm/W
Power	42 W
Lumen Output	5250 lm
CCT	5700 K
CRI	80+
Voltage	AC 100-277 V 50/60 Hz
Beam Angle	120°
Power factor	≥ 0.90
Dimming	Optional

ENVIRONMENT & LIFESPAN

Operating Temperature	-40° F to +131° F
IP Rating	IP66
Operating Hours	Over 50,000 hours lifetime at L70
Warranty	5 Years

CONSTRUCTION

Housing	Aluminum + Polycarbonate Lens
Base / Power Supply	Hard Wired
Finish	Dark Bronze

APPLICATIONS


Ideal for walk ways, general area lighting and building security.

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)	C(in)	D(in)	E(in)
42 W	4.40	10	4.01	13.77	10

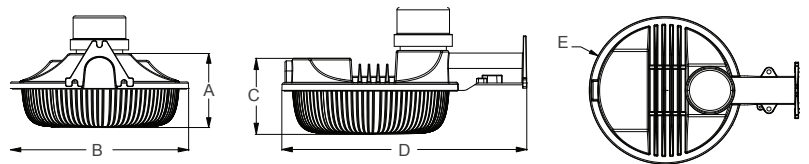

ORDERING INFORMATION

MODEL	POWER	DIMMING	CCT
IK-YDL-L120	- 0042	- DN	- 57-MLV2-N

*Mount to be included as per customer requirement.
 Please refer to the mounting option on next page

PACKAGING

Quantity Per Box	1
Box Dimensions	-----
Box Weight	-----

ACCESSORIES / REPLACEMENT PARTS

- REPLACEMENT LENS FOR SECURITY YARD LIGHT
- REPLACEMENT ARM (90° 1-5/8") FOR SECURITY YARD LIGHT
- 42W REPLACEMENT LED DRIVER
- DUSK TO DAWN TWIST PHOTO CONTROL FOR SECURITY YARD LIGHT
- COIN PHOTO CELL FOR SECURITY YARD LIGHT

OPTOMETRIC DATA

