

Coloris RGBW Edge - Lit Panel Light 1' x 4'

FEATURES

- Has variable CCT options which can be controlled by its switch.
- High energy cost savings of up to 80%.
- Evenly distributed flicker-free light.
- To be used for covered ceilings only.
- 80+ CRI for crisp colors.

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	130 lm/W		
Power	30 W	40 W	50 W
Lumen Output	3900 lm	5200 lm	6500 lm
CCT	Red, Green, Blue, Cool White & Warm White		
CRI	80+		
Voltage	AC 100-277 V 50/60 Hz		
Beam Angle	120°		
Power factor	≥ 0.90		
Dimming	-		

ENVIRONMENT & LIFESPAN

Operating Temperature	-14° F to +113° F
IP Rating	IP20
Operating Hours	Over 50,000 hours lifetime at L70
Warranty	5 Years / 10 Years (Optional)

CONSTRUCTION

Housing	Aluminum
Base / Power Supply	Hard Wired
Finish	White

APPLICATIONS



Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)	C(in)	D(in)
30 W - 50 W	47.7	11.8	0.41	1.77

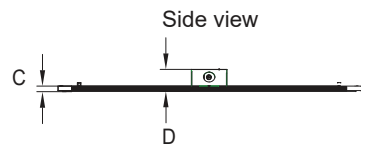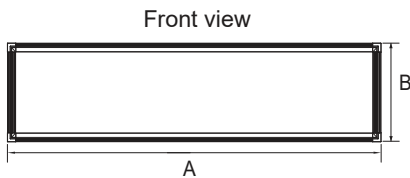

ORDERING INFORMATION

MODEL	POWER	DIMMING
IK-RGBW 14	0030 0040 0050	DX

PACKAGING

Quantity Per Box	2
Box Dimensions	-----
Box Weight	-----

ACCESSORIES / REPLACEMENT PARTS

1x4 SURFACE MOUNTED KIT FOR LED PANEL/WHITE
1X4 FLANGE KIT FOR PANEL & TROFFER/WHITE
1X4 SUSPENDED CABLE MOUNTING KIT FOR LED PANEL
EMERGENCY PACK FOR LED FIXTURE 10W/90 MIN
EMERGENCY PACK FOR LED FIXTURE 15W/90 MIN
40W REPLACEMENT LED POWER SUPPLY

OPTOMETRIC DATA

40 W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

