NOTES : _____

PROJECT NAME : _____

CATALOG NO. : _____

FIXTURE SCHEDULE : _____

Product Specification Sheet | **Industrial Lighting**

# Parko Parking Garage Canopy Light

### FEATURES

- Low profile fixture with a highly reliable LED light engine.
- Die-cast housing which protect LEDs and drivers.
- Suitable for both outdoor and indoor applications.
- Consistent performance even in humid environments.

## PRODUCT DETAILS

### LIGHTING PERFORMANCE

| | | |
|---|---|---|
| **Efficacy** | 130 lm/W | |
| **Power** | 40 W | 60 W |
| **Lumen Output** | 5200 lm | 7800 lm |
| **CCT** | 4000 K, 5000 K, 5700 K | |
| **CRI** | 80+ | |
| **Voltage** | AC 100-277 V 50/60 Hz | |
| **Beam Angle** | 120° | |
| **Power factor** | ≥ 0.90 | |
| **Dimming** | Yes | |

### ENVIRONMENT & LIFESPAN

| | |
|---|---|
| **Operating Temperature** | -13° F to +104° F |
| **IP Rating** | IP65 |
| **Operating Hours** | Over 100,000 hours lifetime at L70 |
| **Warranty** | 10 Years |

### CONSTRUCTION

| | |
|---|---|
| **Housing** | Aluminum + Polycarbonate |
| **Base / Power Supply** | Hard Wired |
| **Finish** | White |

### APPLICATIONS

Garages, Gas Stations, Parking Structures & Walkways.

### QUALIFICATIONS & WARRANTY

c UL us LISTED

10 YEAR WARRANTY

RoHS 2002/95/EC

## DIMENSIONS

| Wattage | A(in) | B(in) | C(in) |
|---|---|---|---|
| 40 W - 60 W | 4.48 | 11.14 | 10.36 |

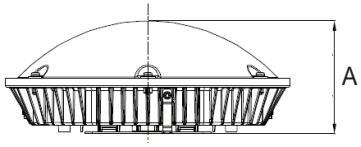





## ORDERING INFORMATION

| MODEL | | POWER | | DIMMING | | CCT |
|---|---|---|---|---|---|---|
| IK-CPBO-L130 | - | 0040 | - | DY | - | 40-S |
| | | 0060 | | | | 40 - 4000K |
| | | | | | | 50 - 5000K |
| | | | | | | 57 - 5700K |

*© IKIO LED LIGHTING. Unauthorized use or reproduction of illustrations, photographs or text is prohibited.
IKIO LED LIGHTING reserves the right to discontinue products or to change the technical and/or design specifications at any time.

Email : info@ikioledlighting.com
Website : www.ikioledlighting.com
Phone : +(1) 844-533-4546

## PACKAGING

| | |
|---|---|
| **Quantity Per Box** | 1 |
| **Box Dimensions** | ------ |
| **Box Weight** | ------ |

## ACCESSORIES / REPLACEMENT PARTS

PENDANT MOUNT BRACKET: PARKING GARAGE CANOPY

SURFACE MOUNT SCREWS: PARKING GARAGE CANOPY

OCCUPANCY SENSOR WITH DAYLIGHT HARVESTING CAPABILITY

REPLACEMENT DRIVER 40W OR 60W

EMERGENCY BATTERY BACK UP DRIVER 10W/90MIN

## OPTOMETRIC DATA

40 W

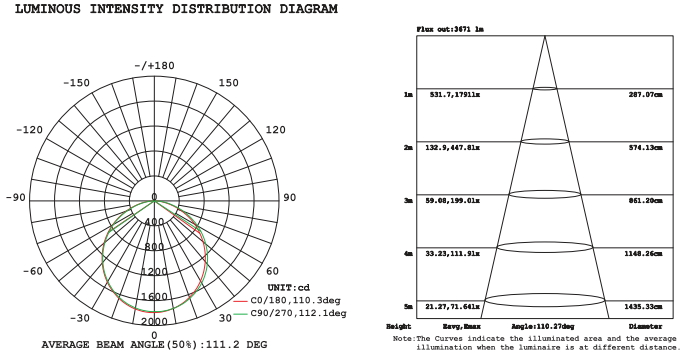





60 W







*© IKIO LED LIGHTING. Unauthorized use or reproduction of illustrations, photographs or text is prohibited.
IKIO LED LIGHTING reserves the right to discontinue products or to change the technical and/or design specifications at any time.

Email : info@ikioledlighting.com
Website : www.ikioledlighting.com
Phone : +(1) 844-533-4546