



Retronym Retrofit Troffer 2' x 2'

FEATURES

- Soft, smooth and uniform light output.
- Suitable for a wide range of applications due to its low profile.
- Up to 30% reduction in energy consumption over traditional linear fluorescent fixtures.
- Metal surfaces are painted pre-fabrication with high gloss baked white matte powder paint, for better and long lasting finish.
- Can be used with existing fixtures for retrofit application.

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	130 lm/W	
Power	25 W	36 W
Lumen Output	3250 lm	4680 lm
CCT	3000 K, 3500 K, 4000 K, 5000 K	
CRI	80+	
Voltage	AC 100-277 V 50/60 Hz	
Beam Angle	120°	
Power factor	≥ 0.90	
Dimming	Yes	

ENVIRONMENT & LIFESPAN

Operating Temperature	-04° F to +122° F
IP Rating	IP40
Operating Hours	Over 50,000 hours lifetime at L70
Warranty	5 Years / 10 Years (Optional)

CONSTRUCTION

Housing	Aluminum / Metal sheet
Base / Power Supply	Hard Wired
Finish	White

APPLICATIONS


Ideal for large warehouses, retail applications, commercial buildings and work areas.

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)	C(in)	D(in)
25 W / 36 W	24.02	22.52	20.67	2.56

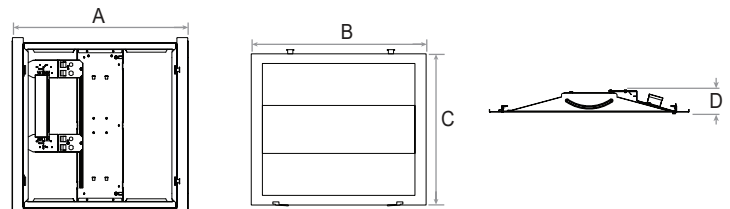

ORDERING INFORMATION

MODEL	POWER	DIMMING	CCT
IK-RT22	0025-X 0036-X	DY	35-J 30- 3000K 35- 3500K 40- 4000K 50- 5000K

PACKAGING


Quantity Per Box	-----
Box Dimensions	-----
Box Weight	-----

ACCESSORIES / REPLACEMENT PARTS

IK55390	EMERGENCY PACK FOR LED FIXTURE 8W/90 MIN/SPLIT TYPE/L
IK55391	EMERGENCY PACK FOR LED FIXTURE 16W/90 MIN/SPLIT TYPE/L
IK55392	EMERGENCY PACK FOR LED FIXTURE 25W/90 MIN/SPLIT TYPE/L
IKSI50-I750	REPLACEMENT DRIVER

OPTOMETRIC DATA

25W

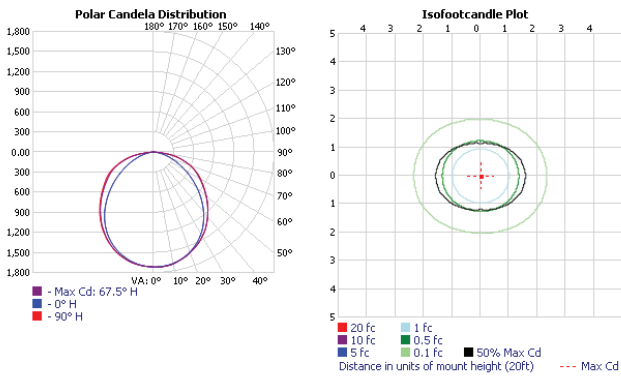

36W

