



Rodella UFO High Bay

FEATURES

- 50,000 hours of life time.
- Smooth and uniform light output with no flickering or humming.
- Superior heat dissipation capability due to its thick aluminum heat sink.
- Elegant and compact design.
- Savings of upto 75% over conventional fluorescent fixtures.
- Resistant to vibration and water.
- Ring Mount included for chain or hook installation.
- Moisture and dust resistant.
- Dimming option available, mode - Voltage (1~10V DC) , PWM signal (10V) , Resistance (10K/N~100K/N Ohms).

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	150 lm/W			
Power	100 W	150 W	200 W	240 W
Lumen Output	15000 lm	22500 lm	30000 lm	36000 lm
CCT	3000 K, 3500 K, 4000 K, 4500 K, 5000 K, 5700 K			
CRI	70+			
Voltage	AC 100-277 V 50/60 Hz, also available in 346-480 v			
Beam Angle	40°, 60°, 90°, 120°			
Power factor	> 0.90			
Dimming	Optional			

ENVIRONMENT & LIFESPAN

Operating Temperature	-10° F to +120° F
Rating	IP66
Operating Hours	Over 50,000 hours lifetime at L70
Warranty	5 Years

CONSTRUCTION

Housing	Copper-free Aluminum
Base / Power Supply	Direct Wire
Finish	Black

APPLICATIONS


Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)
100 W	7.20	9.60
150 W	7.90	9.60
200 W - 240 W	8.10	11.80

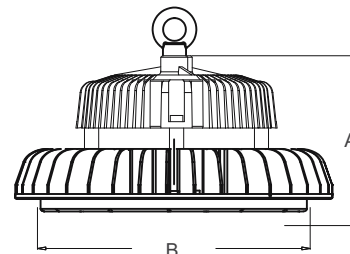

ORDERING INFORMATION

MODEL	POWER	DIMMING	
IK-HBP2	100W	DY	RLV01
	100W	DN - Non Dimmable	RLV01
	150W	DY - Dimmable	RLV02
	200W		
	240W		

RLV01 - for 100W - 150W
RLV02 - for 200W - 240W


PACKAGING

Quantity Per Box	-----
Box Dimensions	-----
Box Weight	-----

ACCESSORIES

- ADJUSTABLE ANGLE MOUNTING BRACKET FOR UFO HIGH BAY
- MICROWAVE MOTION SENSOR FOR UFO HIGH BAY /100-277V 1-10V DIMM/KIT
- 16" ALUMINUM REFLECTOR FOR UFO HIGH BAY
- 16" ACRYLIC REFLECTOR FOR UFO HIGH BAY
- 16" ACRYLIC BOTTOM LENS FOR ACRYLIC REFLECTOR FOR UFO HIGH BAY
- EMERGENCY BACKUP DRIVER: 100W/150W/200W/240W FOR UFO UFO HIGH BAY
- MOUNTING BRACKET: HOOK MOUNT (AVAILABLE IN 120-277V AC INPUT ONLY)
- MOUNTING BRACKET: 'U' TYPE (AVAILABLE IN 120-277 V AND 277-480 V AC INPUT
- MOUNTING BRACKET: TRUNNION FLOOD TYPE (AVAILABLE IN 120-277V AC INPUT ONLY)

OPTOMETRIC DATA & LIGHT DISTRIBUTIONS

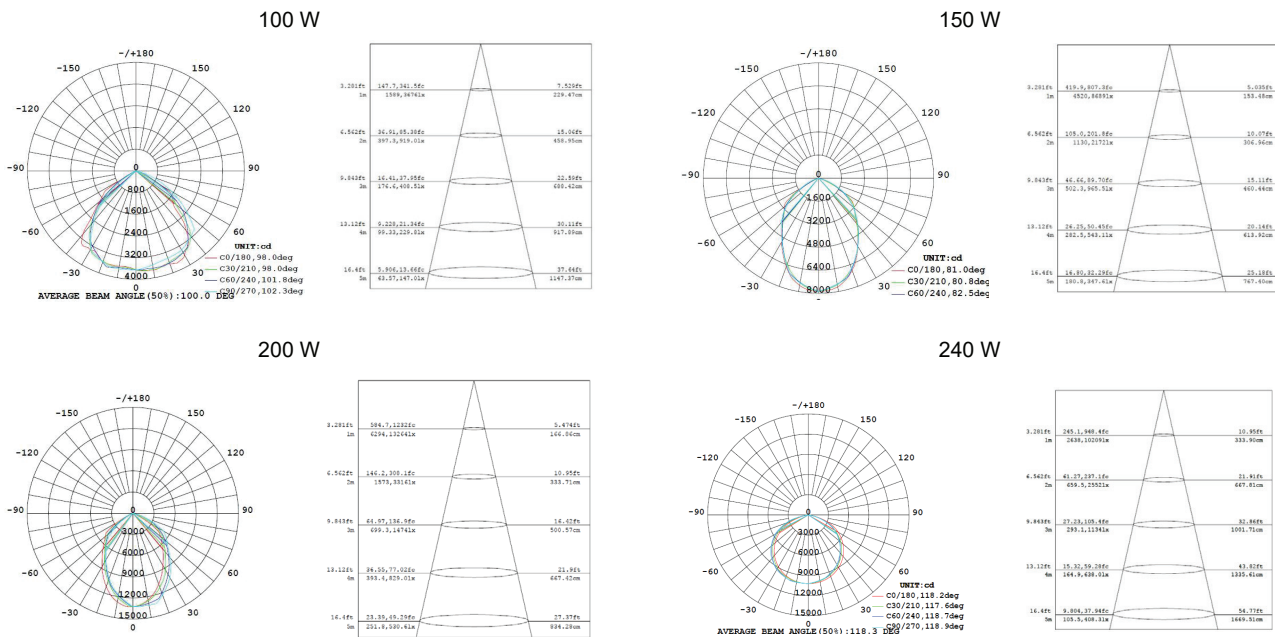

MOUNTING OPTIONS



Hook Mount
(100 V - 277 V only)



Type U Bracket
(100 V - 277 V & 200 V - 480 V)



Flood Light Bracket
adjustable angle
(100 V - 277 V only)



Covers
60°, 90°, 120°
16", 19", 22"