



Superia Linear High Bay

FEATURES

- Exceptional efficacy (200 lm/W).
- 100,000 hours of life time.
- Superior heat dissipation capability due to use of multiple heat sinks.
- Smooth and uniform light output with no flickering or humming.
- Sleek design and Low-profile makes it suitable for a wide range of applications.
- Resistant to vibration and water.

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	200 lm/W		
Power	60 W	100 W	200 W
Lumen Output	12000 lm	20000 lm	40000 lm
CCT	5000 K		
CRI	80+		
Voltage	AC 100-277 V 50/60 Hz		
Beam Angle	120°		
Power factor	≥ 0.90		
Dimming	Yes		

ENVIRONMENT & LIFESPAN

Operating Temperature	-10° F to +120° F
IP Rating	IP 20
Operating Hours	Over 100,000 hours lifetime at L70
Warranty	10 Years

DIMENSIONS

Wattage	A(in)	B(in)	C(in)
60 W / 100 W	23	18.5	16.29
200 W	43.5	18.5	16.29

CONSTRUCTION

Housing	Aluminum + Polycarbonate (Diffuser)
Base / Power Supply	Hard Wired
Finish	White


APPLICATIONS

Ideal for larger warehouses, retail applications, commercial buildings and work areas.

QUALIFICATIONS & WARRANTY



Not all products are qualified on the DLC QPL.
To view our DLC qualified Products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

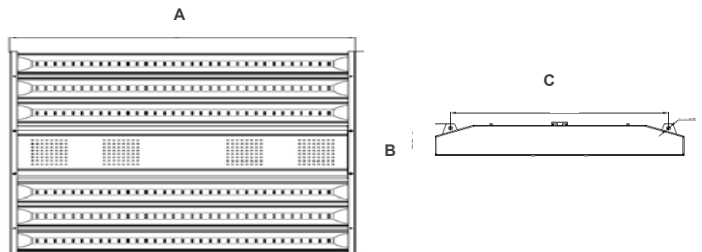

ORDERING INFORMATION

MODEL	POWER
IK-HBPX-L200	- 0060-XX 0100-XX 0200-XX

PACKAGING

Quantity Per Box	1
Box Dimensions	-----
Box Weight	-----

ACCESSORIES / REPLACEMENT PARTS

360° LED LOW/HIGH BAY FIXTURE PIR OCCUPANCY SENSOR WITH DAY LIGHT HARVESTING CAPABILITY 120-277V
REPLACEMENT LENS FOR LED FLAT HIGH BAY CLEAR/FROSTED
EMERGENCY PACK FOR LED FIXTURE 10W / 90 MIN
EMERGENCY PACK FOR LED FIXTURE 15W / 90 MIN
EMERGENCY PACK FOR LED FIXTURE 28W / 90 MIN
WIRE GUARD WITH CLIPS
REPLACEMENT DRIVER 60 W / 100 W / 200 W

OPTOMETRIC DATA

