
## T8 TUBE TYPE C



## **INSTALLATION INSTRUCTIONS**

## **Direct Replacement Procedure**

- 1. Turn off the power to the fixture at the breaker panel before installation.
- 2. Open the diffuser from the light fixture.
- 3. Remove the fluorescent tube and dispose of it properly as it may contain mercury.
- 4. Make the new wire connection (A) to the branch circuit.
- 5. When installing the LED tube, ensure that the pins are firmly seated in lamp holders, and then close the diffuser.
- 6. Switch on the power to the fixture at the breaker panel.

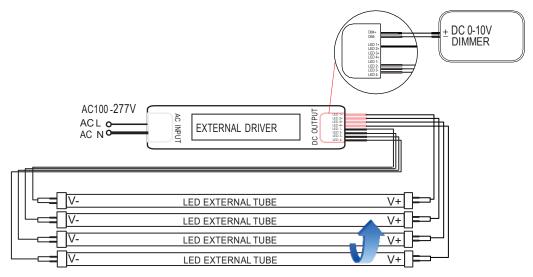

\*As shown in the image, one driver is enough for 4 tubes.

## Caution:

- Risk of fire. Do not install this light in a pre-heated fixture.
- Loose or damaged end caps and/or lamp holders need to be replaced before installation.
- To avoid the risk of an electric shock, do the installation while wearing gloves.
- Use to retrofit only those fluorescent lamps that are specified on the label.
- This tube is intended for use with emergency exits.
- This tube is be used with a light dimmer.
- If the lamp or luminaire exhibits undesirable operation (buzzing, flickering, etc.), immediately turn off power and remove the lamp from luminaire and contact manufacturer.
- Not suitable for wet locations.
- Do not make mass installation before sample testing.