



T8 Tube - Type A&B (4 ft)

FEATURES

- Can be rewired in a few simple steps to run on line voltage.
- Can also be used with existing instant start ballasts.
- Uniform and smooth light without any flickering, and excellent efficacy.
- Dual Mode Internal Driver (UL Type A and Type B).

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	175 lm/W				
Power	10 W	12 W	15 W	18 W	20 W
Lumen Output	1750 lm	2100 lm	2625 lm	3150 lm	3500 lm
CCT	3000 K, 3500 K, 4000 K, 5000 K				
CRI	80+				
Voltage	AC 100-277 V 50/60 Hz				
Beam Angle	180°				
Power factor	≥ 0.90				
Dimming	No				

ENVIRONMENT & LIFESPAN

Operating Temperature	-13° F to +113° F
IP Rating	IP20
Operating Hours	Over 50,000 hours lifetime at L70
Warranty	5 Years

CONSTRUCTION

Housing	Aluminum + Polycarbonate
Base / Power Supply	G13 / Direct Wire or Ballast use
Diffuser	Clear / Frosted

APPLICATIONS


Parking lot, street and building perimeter lighting.

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)	C(in)
10 W - 20 W	48	0.50	1.15

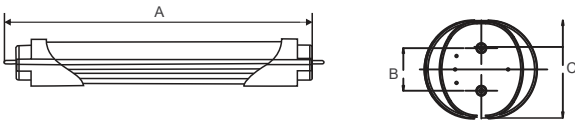

ORDERING INFORMATION

MODEL	POWER	DIMMING	CCT	DIFFUSER
IK-T804-L175	0010	DN	30A&B-J	(Clear)
	0012	DN - Non Dimmable	30- 3000K	(Frosted)
	0015		35- 3500K	
	0018		40- 4000K	
	0020		50- 5000K	

PACKAGING

Quantity Per Box	-----
Box Dimensions	-----
Box Weight	-----

OPTOMETRIC DATA

15 W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

