



T8 U-Bend Tube - Type A&B

FEATURES

- Compact and sleek U-bend shape.
- Can be rewired in a few simple steps to run on line voltage.
- Can also be used with existing instant start ballasts.
- Uniform and smooth light without any flickering, and excellent efficacy.
- Dual Mode Internal Driver (UL Type A and Type B).

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	130 lm/W
Power	15 W
Lumen Output	1950 lm
CCT	3000 K, 3500 K, 4000 K, 5000 K
CRI	80+
Voltage	AC 100-277 V 50/60 Hz
Beam Angle	180°
Power factor	≥ 0.90
Dimming	No

ENVIRONMENT & LIFESPAN

Operating Temperature	-22° F to +149° F
IP Rating	IP20
Operating Hours	Over 50,000 hours lifetime at L70
Warranty	5 Years

CONSTRUCTION

Housing	Aluminum + Polycarbonate
Base / Power Supply	G13 / Hard Wired
Diffuser	Clear / Frosted

APPLICATIONS


Commercial Spaces, Residential Area and Office Area

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)	C(in)
15 W	11.92	0.80	5.9

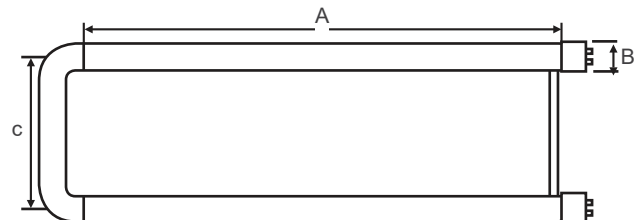

ORDERING INFORMATION

MODEL	POWER	CCT	
IK-T802U	0015	30	A&B-J
		30- 3000K	
		35- 3500K	
		40- 4000K	
		50- 5000K	

PACKAGING

Quantity Per Box	-----
Box Dimensions	-----
Box Weight	-----

OPTOMETRIC DATA

15 W

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

