



Tipis Ultra - Slim Flood Light

FEATURES

- Ultra slim design, making it ideal for compact areas.
- Saves up to 50% more than traditional lighting because of low energy consumption.
- Acid, alkali and salt erosion resistant due to solid coating.
- Superior heat dispersion capability.
- Suitable for operation in low temperature.

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	130 lm/W		
Power	100 W	150 W	200 W
Lumen Output	13000 lm	19500 lm	26000 lm
CCT	4000 K, 5000 K, 5700 K		
CRI	80+		
Voltage	AC 100-277 V 50/60 Hz		
Beam Angle	120°		
Power factor	≥ 0.90		
Dimming	No		

ENVIRONMENT & LIFESPAN

Operating Temperature	-10° F to +160° F
IP Rating	IP65
Operating Hours	Over 100,000 hours lifetime at L70
Warranty	10 Years

CONSTRUCTION

Housing	Aluminum
Base / Power Supply	Hard Wired
Finish	Black

APPLICATIONS


Wall washing, landscaping lighting, outdoor advertising and square nocturnes.

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)	C(in)	D(in)	E(in)
100 W / 150 W / 200 W	13.66	17.36	8.66	0.50	2.55



ORDERING INFORMATION

MODEL	POWER	CCT
IK-FLBO	0100	40
	0150	40- 4000 K
	0200	50- 5000 K
		57- 5700 K

PACKAGING


Quantity Per Box	1
Box Dimensions	----
Box Weight	----

ACCESSORIES / REPLACEMENT PARTS


REPLACEMENT DRIVER FOR 100W / 150W / 200W ULTRA SLIM FLOOD LIGHT SERIES

OPTOMETRIC DATA

100 W

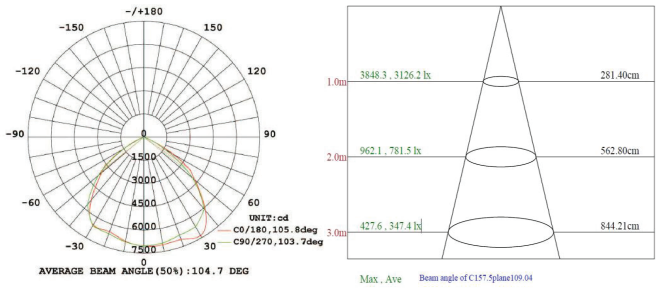

150 W

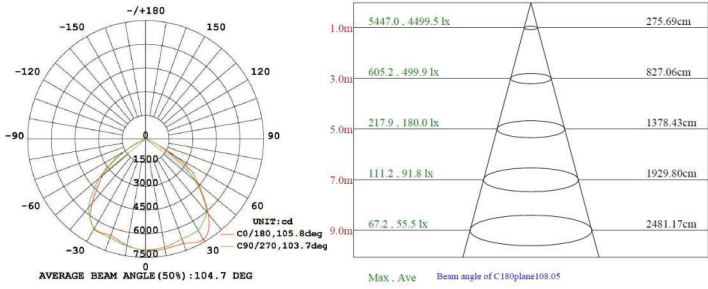

200 W

