



Hugo High Power UFO High Bay

FEATURES

- Available in high wattages of 400 W and 500 W.
- 100,000 hours of life time.
- Smooth and uniform light output with no flickering or humming.
- Superior heat dissipation capability due to it's thick aluminum heat sink.
- Savings of up to 75% over conventional fluorescent fixtures.
- Moisture and dust resistant.

PRODUCT DETAILS

LIGHTING PERFORMANCE

Efficacy	125 lm/W	
Power	400 W	500 W
Lumen Output	50000 lm	62500 lm
CCT	3000 K, 3500 K, 4000 K, 5000 K, 5700 K	
CRI	80+	
Voltage	AC 100-277 V 50/60 Hz, also available in 346-480 V	
Beam Angle	120°	
Power factor	≥ 0.90	
Dimming	Yes	

ENVIRONMENT & LIFESPAN

Operating Temperature	-10° F to +120° F
IP Rating	IP 65
Operating Hours	Over 100,000 hours lifetime at L70
Warranty	10 Years

CONSTRUCTION

Housing	Aluminum + Polycarbonate (Diffuser)
Base / Power Supply	Hard Wired
Finish	Black

APPLICATIONS


Ideal for retrofitting inefficient fixtures in malls, hospitals, airports, offices, lobbies and other residential and commercial applications.

QUALIFICATIONS & WARRANTY



DIMENSIONS

Wattage	A(in)	B(in)	C(in)
400 W / 500 W	8.03	14.17	10.07

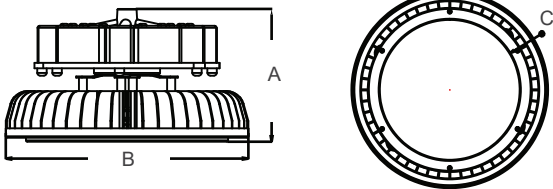

ORDERING INFORMATION

MODEL	POWER	CCT
IK-HBUF-B130	0400 0500	30 30- 3000 K 50- 5000 K 35- 3500 K 57- 5700 K 40- 4000 K 45- 4500 K



Product Specification Sheet | Industrial Lighting

PACKAGING

Quantity Per Box	1
Box Dimensions	-----
Box Weight	-----

ACCESSORIES / REPLACEMENT PARTS

- ADJUSTABLE ANGLE MOUNTING BRACKET FOR UFO HIGH BAY High Power Series
- MICROWAVE MOTION SENSOR FOR UFO HIGH BAY High Power Series/100-277V 1-10V DIMM/KIT
- 16" ALUMINUM REFLECTOR FOR UFO HIGH BAY High Power
- 16" ACRYLIC REFLECTOR FOR UFO HIGH BAY High Power Series
- 16" ACRYLIC BOTTOM LENS FOR ACRYLIC REFLECTOR FOR UFO HIGH BAY High Power Series
- EMERGENCY BACKUP DRIVER: 400W/500W FOR UFO HIGH BAY High Power Series

OPTOMETRIC DATA

